

GENERAL FEATURES

- Combine the characteristics of lead acid battery and super capacitor
- Long life cycle service design, excellent PSoc and cyclic performance
- High power, rapid charging and discharging
- Unique grid and lead pasting design
- Extreme temperature tolerance


APPLICATIONS

- Energy storage system
- Smart power grids and micro grids system
- Hybrid energy storage system
- New energy such as Generator and battery hybrid energy system



DIMENSIONS & WEIGHT

Length(mm)	350±1
Width(mm)	167±1
Height(mm)	178±1
Total Height(mm)	178±1
Weight(kg)	23.0±3%

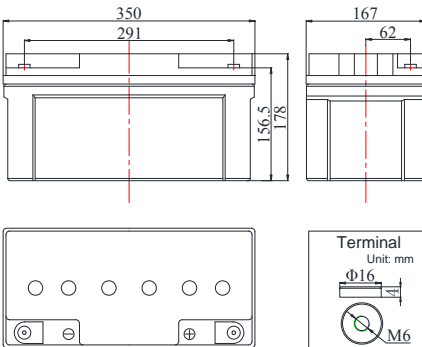

TECHNICAL SPECIFICATIONS

Nominal Voltage		12V(6 cells per unit)
Design Floating Life @25°C		20 Years
Nominal Capacity @25°C(20 hour rate@3.00A,10.50V)		60.0Ah
Capacity @25°C	10 hour rate (5.57A,10.8V)	55.7Ah
	5 hour rate (10.3A,10.5V)	51.5Ah
	1 hour rate (36.1A,9.60V)	36.1Ah
Internal Resistance	Full Charged Battery@25°C	≤8.8mΩ
Ambient Temperature	Discharge	-30°C~60°C
	Charge	-30°C~60°C
	Storage	-30°C~60°C
Max. Discharge Current@25°C		600A(5s)
Capacity affected by Temperature (10 hr Capacity)	40°C	108%
	25°C	100%
	0°C	90%
	-15°C	70%
Self-Discharge@25°C per Month		3%
Charge (Constant Voltage) @25°C	Standby Use	Initial Charging Current Less than 18.0A Voltage 13.6-13.8V
	Cycle Use	Initial Charging Current Less than 18.0A Voltage 14.4-14.7V



COMPLIED STANDARDS

IEC 60896-21/22	JIS C8704
YD/T799	BS6290 part4
GB/T 19638	UL 1989

BATTERY DISCHARGE TABLE

Discharge Constant Current per Cell (Amperes at 25°C)







F.V/Time	5min	10min	15min	20min	25min	30min	35min	40min	45min	60min	90min	2h	3h	4h	5h	6h	7h	8h	10h	12h	20h
1.60V	163.2	104.0	88.4	72.0	63.4	56.5	49.9	45.3	41.5	36.1	29.1	22.9	16.1	13.2	10.9	9.2	8.1	7.2	6.11	5.14	3.18
1.65V	160.2	102.1	86.8	70.8	62.4	55.5	48.9	44.5	40.7	35.4	28.6	22.5	15.8	12.9	10.7	9.0	7.9	7.1	6.00	5.05	3.12
1.67V	158.6	101.1	85.8	69.7	61.8	55.0	48.7	44.3	40.5	35.1	28.4	22.3	15.6	12.8	10.6	8.9	7.9	7.0	5.94	5.01	3.09
1.70V	155.4	99.3	84.2	68.4	60.6	53.9	47.9	43.5	39.8	34.3	27.8	22.1	15.5	12.7	10.5	8.8	7.8	6.9	5.81	4.93	3.07
1.75V	154.2	98.3	83.6	67.6	59.7	53.4	47.2	42.9	39.3	34.0	27.5	21.6	15.2	12.5	10.3	8.7	7.7	6.8	5.75	4.85	3.00
1.80V	149.3	95.1	80.7	66.1	57.9	51.7	45.8	41.7	38.1	32.9	26.7	20.8	14.6	11.9	9.9	8.4	7.3	6.6	5.57	4.69	2.91
1.85V	140.4	89.7	75.9	62.0	54.4	48.6	43.1	39.2	35.8	31.0	25.1	19.7	13.8	11.2	9.3	7.9	6.9	6.2	5.23	4.41	2.64

Discharge Constant Power per Cell (Watts at 25°C)

F.V/Time	5min	10min	15min	20min	25min	30min	35min	40min	45min	60min	90min	2h	3h	4h	5h	6h	7h	8h	10h	12h	20h
1.60V	305.7	196.1	166.7	136.4	120.7	107.9	95.3	86.9	79.5	69.3	55.8	44.0	30.9	25.3	20.9	17.5	15.5	13.8	11.7	9.9	6.18
1.65V	301.3	193.2	164.6	134.7	119.1	106.4	93.6	85.1	78.3	68.0	54.9	43.2	30.4	24.9	20.6	17.2	15.3	13.6	11.5	9.7	6.12
1.67V	299.2	191.6	163.1	133.4	118.1	105.5	93.1	84.9	77.9	67.3	54.5	42.8	30.1	24.6	20.4	17.1	15.1	13.5	11.4	9.7	6.09
1.70V	296.4	188.8	160.5	130.9	116.0	103.4	91.8	83.5	76.7	66.1	53.4	42.5	29.8	24.3	20.3	17.0	15.0	13.4	11.2	9.5	6.06
1.75V	294.9	187.3	159.4	129.2	114.3	102.5	90.6	82.5	75.5	65.4	52.8	41.6	29.2	24.0	19.9	16.7	14.7	13.1	11.1	9.4	5.94
1.80V	286.2	182.0	154.6	126.8	111.3	99.3	88.0	80.3	73.3	63.4	51.2	40.1	28.1	22.9	19.2	16.1	14.1	12.6	10.7	9.1	5.76
1.85V	269.9	172.9	146.6	120.0	105.5	94.2	83.5	75.9	69.6	60.2	48.6	38.2	26.7	21.8	18.2	15.4	13.5	12.0	10.2	8.6	5.24

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact Vito for the latest information.

PERFORMANCE CHARACTERISTICS

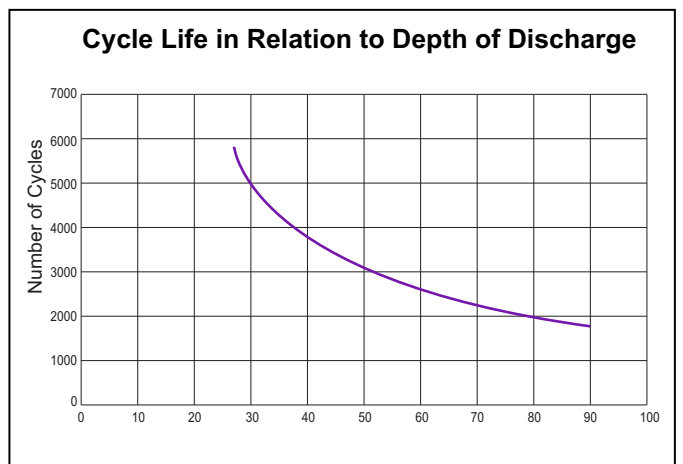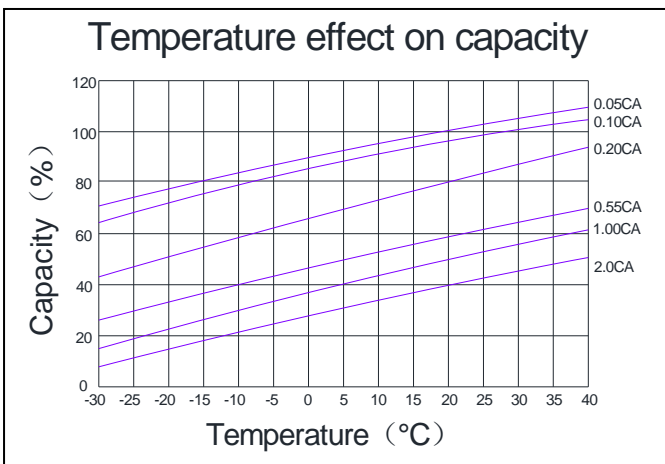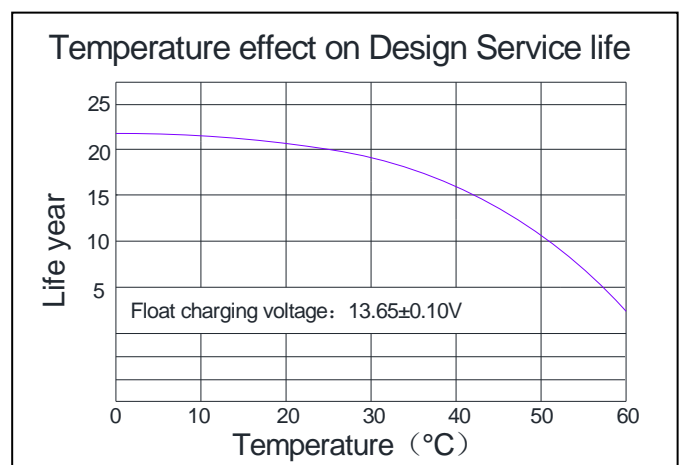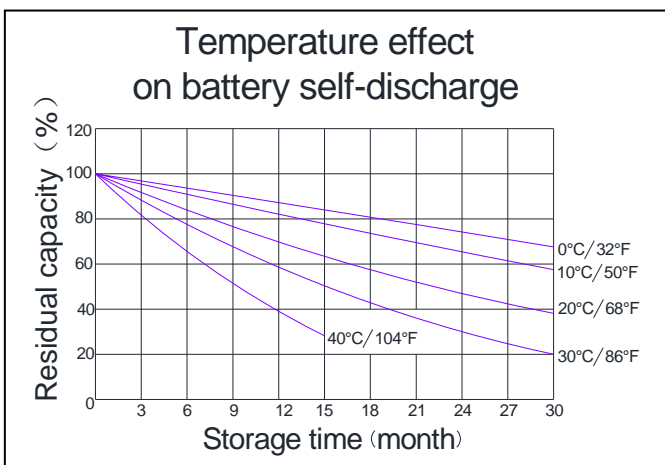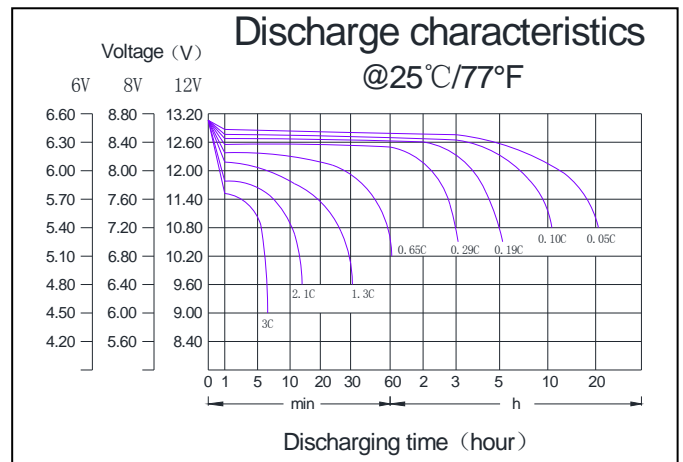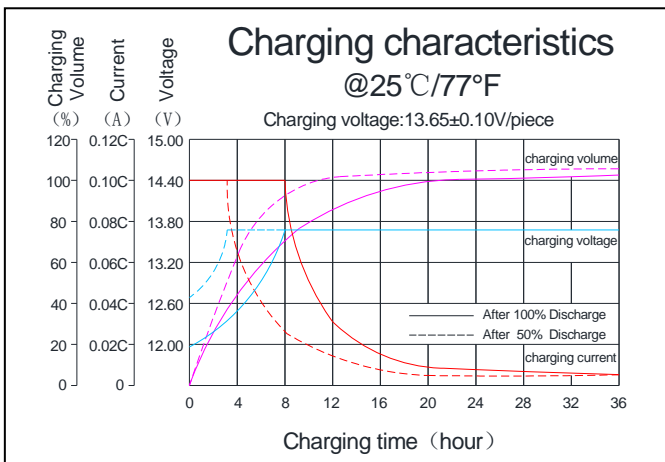

BATTERY CONSTRUCTION

Component	Positive plate	Negative plate	Container & Cover	Safety valve	Terminal	Separator	Electrolyte	Pillar seal
Features	Rare earth alloy grid with good corrosion resistance	Unique anode formula, high purity material, low self-discharge rate	Fire resistance ABS	Flame resistance, aging resistance	Female Copper Insert M6	Separator with organic fiber, very long service life	Gradual change gel electrolyte (with patent)	Anti-corrosion elastic O ring, two layers epoxy seal technology